


ISS Theoretical exercise 4 for lab #6

6 (2012/13) or 18 (2013/14 t/t)

A digital filter is given by its scheme

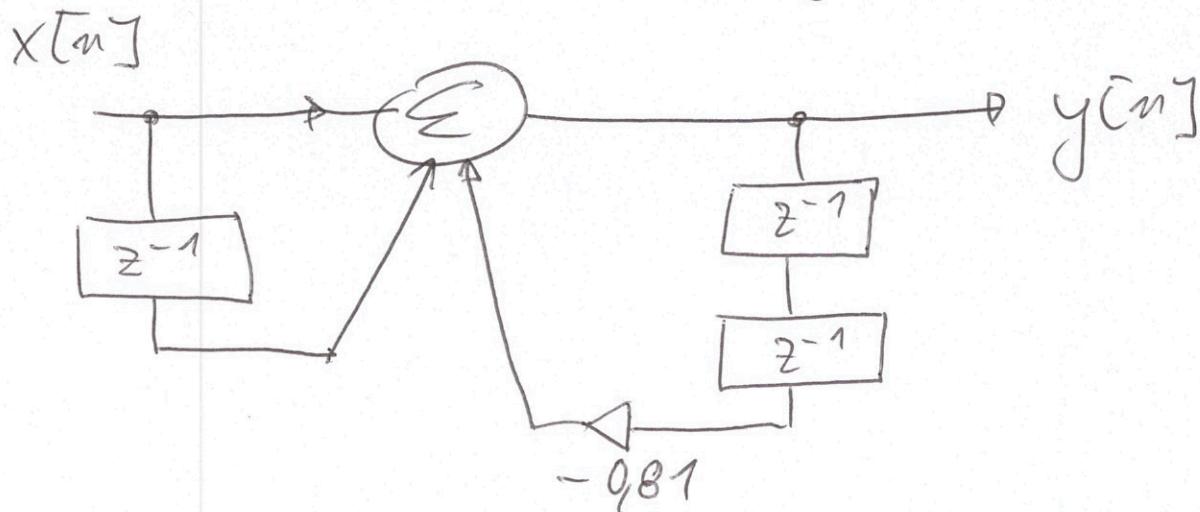

① Determine its difference equation:

just rewrite the scheme into equations:

$$y[n] = x[n] + x[n-1] - 0.81 y[n-2]$$

(you can remind the students that the general form is $y[n] = \sum_{k=0}^{\Phi} b_k x[n-k] - \sum_{k=1}^{\Phi} a_k y[n-k]$)

② Perform Z-transform of this equation and write transfer function of the filter.

$$1) x[n] \rightarrow X(z)$$

3 rules of z-transform: 2) constant \rightarrow constant
3) $x[n-k] \rightarrow X(z)z^{-k}$

$$Y(z) = X(z) + X(z)z^{-1} - 0,81 Y(z)z^{-2}$$

(2)

③ now group things belonging to X and Y :

$$Y(z) + 0,81 Y(z)z^{-2} = X(z) + X(z)z^{-1}$$

$$Y(z) [1 + 0,81 z^{-2}] = X(z) [1 + z^{-1}]$$

it is now easy to find: $H(z) = \frac{Y(z)}{X(z)}$ just by re-shuffling the terms ...

$$\frac{Y(z)}{X(z)} = \frac{1+z^{-1}}{1+0,81z^{-2}}$$
 this is it!

$$H(z) = \frac{1+z^{-1}}{1+0,81z^{-2}}$$

general form of this is

$$H(z) = \frac{\sum_{k=0}^Q b_k z^{-k}}{1 + \sum_{k=1}^P a_k z^{-k}}$$

④ Find coefficients b_k of the numerator and a_k of the denominator.

This is pretty easy by looking at this.

$$b_0 = 1 \quad b_1 = \cancel{0,81} \quad a_2 = 0,81$$

They are visible also in the scheme and difference equation, a_k 's with negative sign!

(5) Convert $H(z)$ to the form with zeros and poles. (3)

First, we need to convert the thing into the form with positive powers of z :

$$H(z) = \frac{1+z^{-1}}{1+0,81z^{-2}} = \frac{z^{-1}(z+1)}{z^{-2}(z^2+0,81)} = \frac{z^{(2+1)}}{z^2+0,81}$$

(6) Let us work on looking for roots of the polynomials... [denominator]

another one is $z_2 = 0$

$$z+1 = 0 \quad z_1 = -1 \quad \dots \text{root of numerator!}$$

(7) $z^2 + 0,81 = 0 \quad \dots$ ouff, this looks like quadratic equation...

$$z_{1/2} = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a} = \frac{-0 \pm \sqrt{0^2 - 4 \cdot 1 \cdot 0,81}}{2 \cdot 1} = \frac{\pm \sqrt{-4 \cdot 0,81}}{2} \quad \text{simplifying... } \frac{\pm \sqrt{4} \sqrt{-0,81}}{2} =$$

$= \pm \sqrt{-0,81}$ this is a complex number!

$z_1 = +0,9j \quad z_2 = -0,9j \leftarrow$ roots of the denominator.

~~$\frac{(z+1)(z-(0-1))(z-0)}{(z+0,9j)(z-0,9j)}$~~ trying to get rid of this...
 ~~$\frac{z^3 - z^2 - z + 1}{z^2 - 0,81z^2 + 0,81}$~~

④


~~⑧ this z will actually create one more zero, as $z = z_0 \text{ or}$~~

$$H(z) = \frac{(z - 0)(z - (-1))}{(z - 0,9j)(z + 0,9j)}$$

... general form is

$$H(z) = b_0 z^{P-Q} \frac{\prod_{k=1}^Q (z - m_k)}{\prod_{k=1}^P (z - p_k)}$$

⑨ Draw the zeros and poles to complex plane "z" and check the stability of the filter.

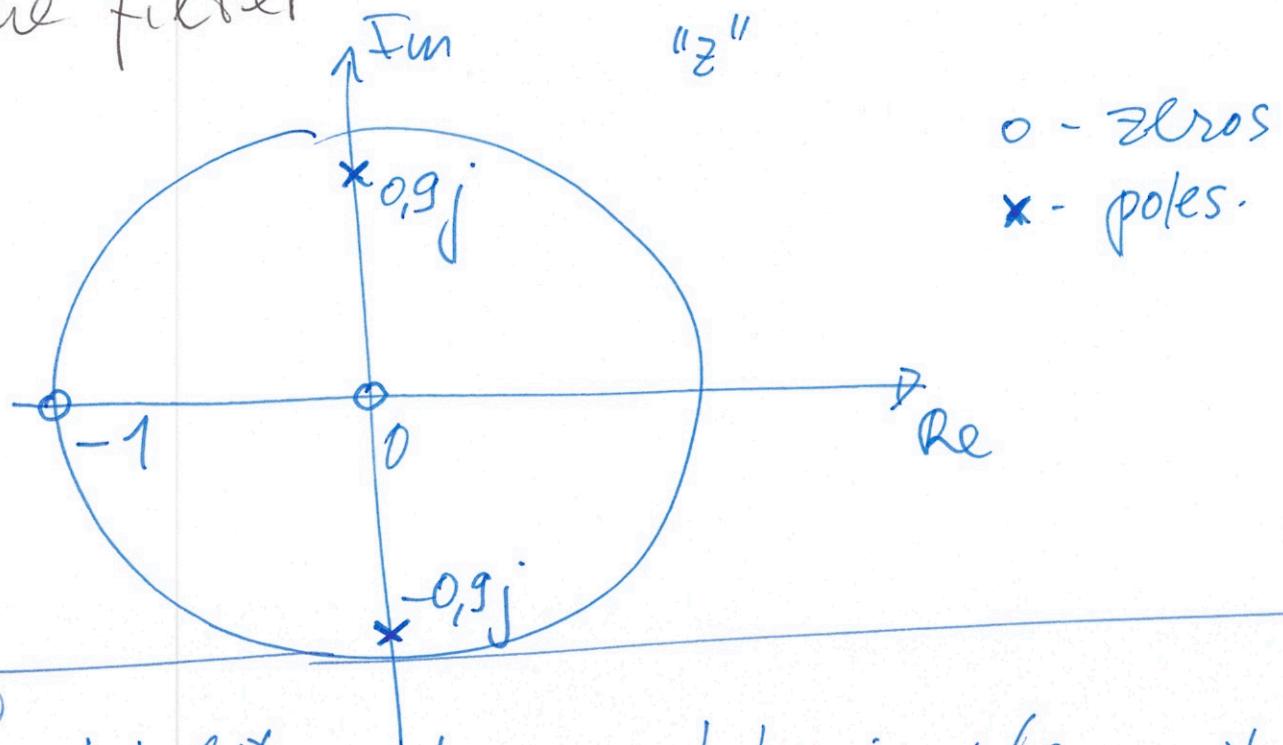

o - zeros
x - poles.

⑩ For stability, poles must be inside unit circle, or $|p_k| < 1$. This is true \Rightarrow STABLE

11) Using zeros and poles, estimate the magnitude and phase of the frequency response of the filter

in three (normalized angular) frequencies: $\omega_1 = 0$, $\omega_2 = \frac{\pi}{2}$, $\omega_3 = 0.999\pi$

Try to draw the complete freq. response and compare with the one computed by Matlab.

$$H(e^{j\omega}) = H(z) \Big|_{z=e^{j\omega}} \quad \text{we look for all } z's \text{ and replace them with } e^{j\omega}!$$

$$H(e^{j\omega}) = \frac{(e^{j\omega} - 0)(e^{j\omega} - (-1))}{(e^{j\omega} - 0.9j)(e^{j\omega} - (-0.9j))} \quad e^{j\omega} \text{ lies on the unit circle.}$$


see next page!

Each bracket in this is a complex number given by a difference of $e^{j\omega}$ and the respective zero (or pole).

The magnitude of the result will be

$$|H(e^{j\omega})| = \frac{| \spadesuit | \cdot | + |}{| \heartsuit | \cdot | \clubsuit |} \quad \text{we work with absolute values.}$$

⑥

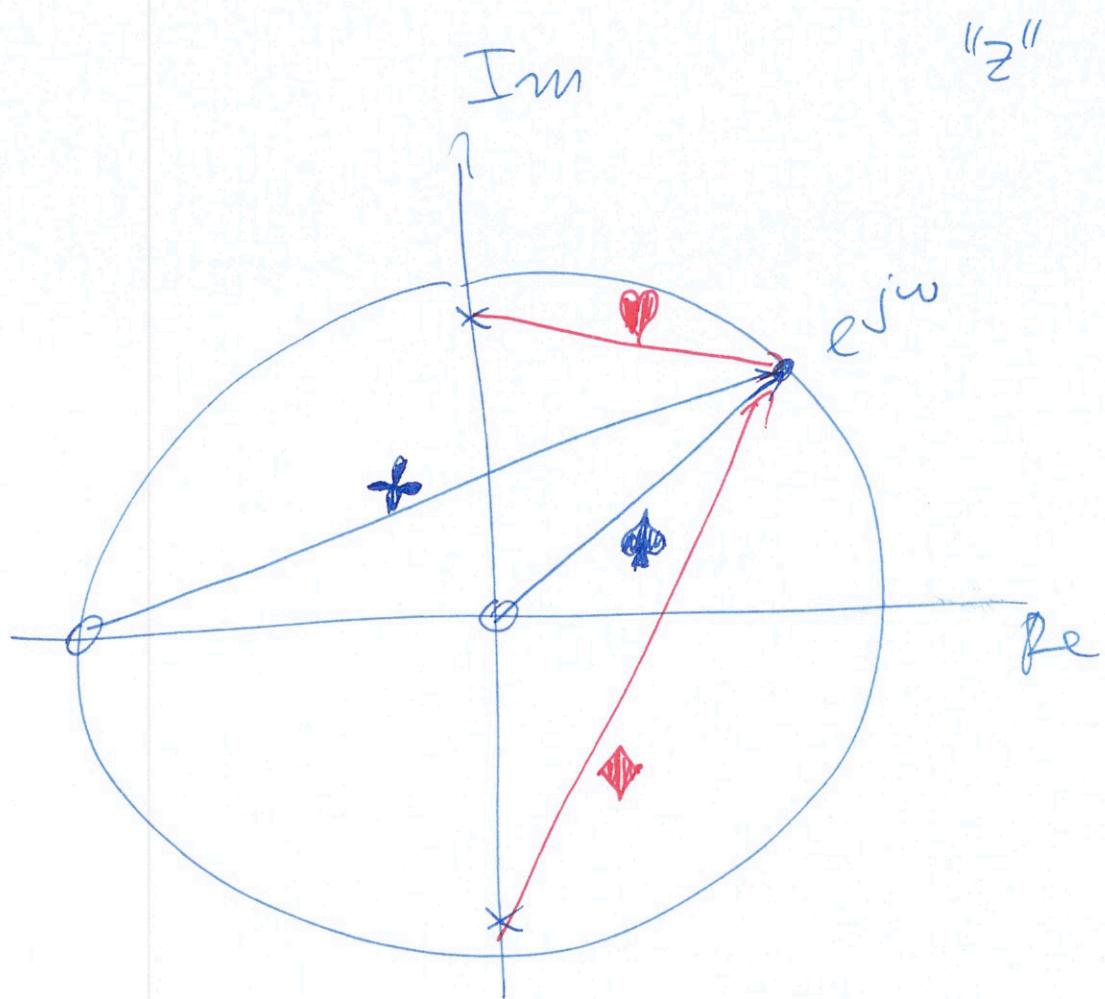

The angle will be


$$\arg H(e^{j\omega}) = \arg \text{ } \rightarrow + \arg \text{ } \leftarrow - \arg \text{ } \heartsuit - \arg \text{ } \clubsuit$$

↑ arguments.


These are the standard rules for multiplication and division of complex numbers.

In the complex plane, we can imagine \rightarrow , \leftarrow , \heartsuit and \clubsuit as vectors

starting in respective zero on pole and ending in $e^{j\omega}$. $| \cdot |$ is the length of such vector and $\arg .$ is the angle of this vector respective to the real axis.

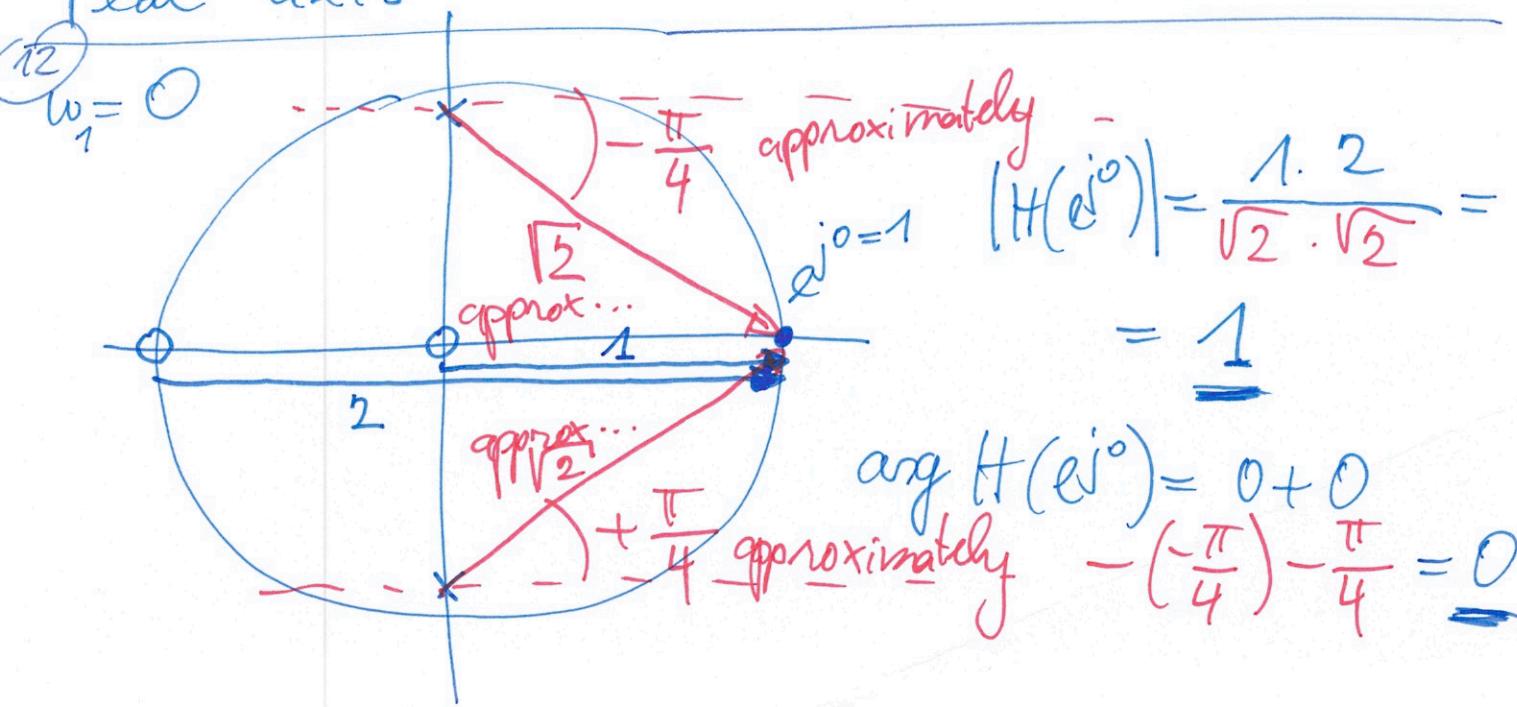


$$iB \quad w_2 = \frac{\pi}{2}$$

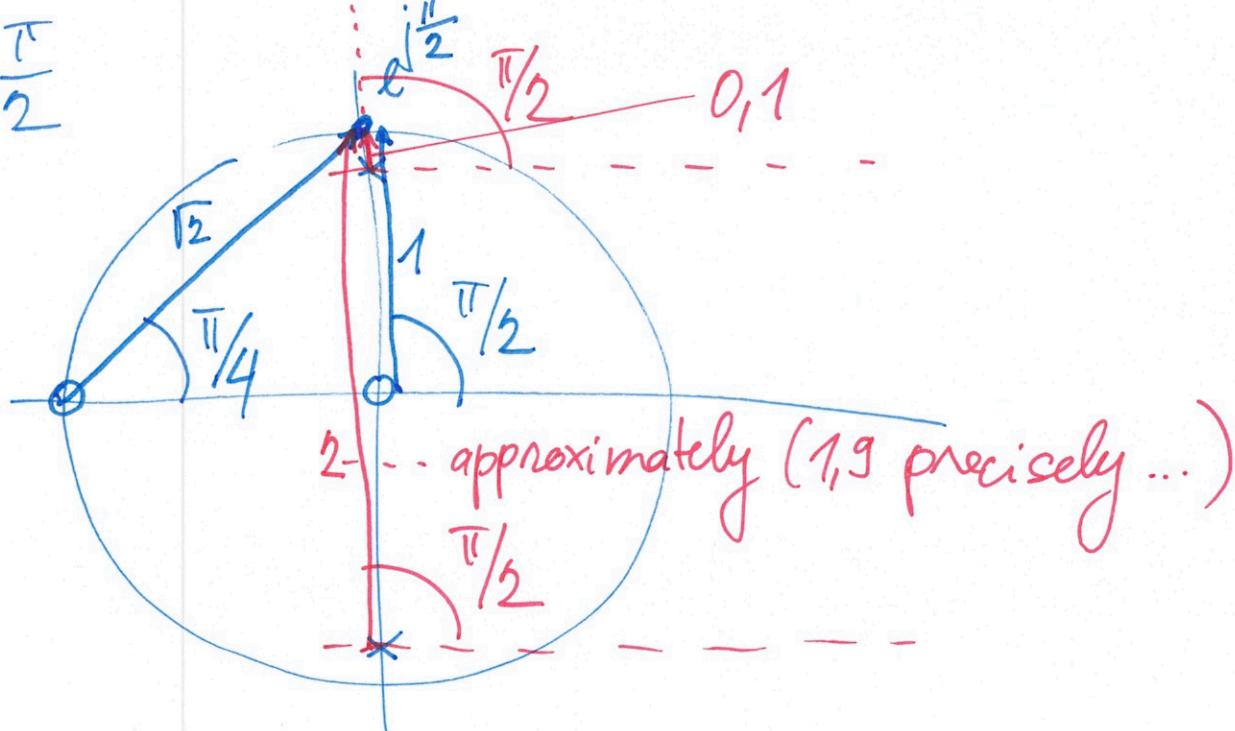


$$|H(e^{j\frac{\pi}{2}})| = \frac{1 \cdot \sqrt{2}}{0,1 \cdot 2} = 10 \cdot \frac{1}{\sqrt{2}} = \underline{\underline{7}}$$

$$\arg H(e^{j\frac{\pi}{2}}) = \pi/2 + \pi/4 - \pi/2 - \pi/2 = -\frac{\pi}{4}$$

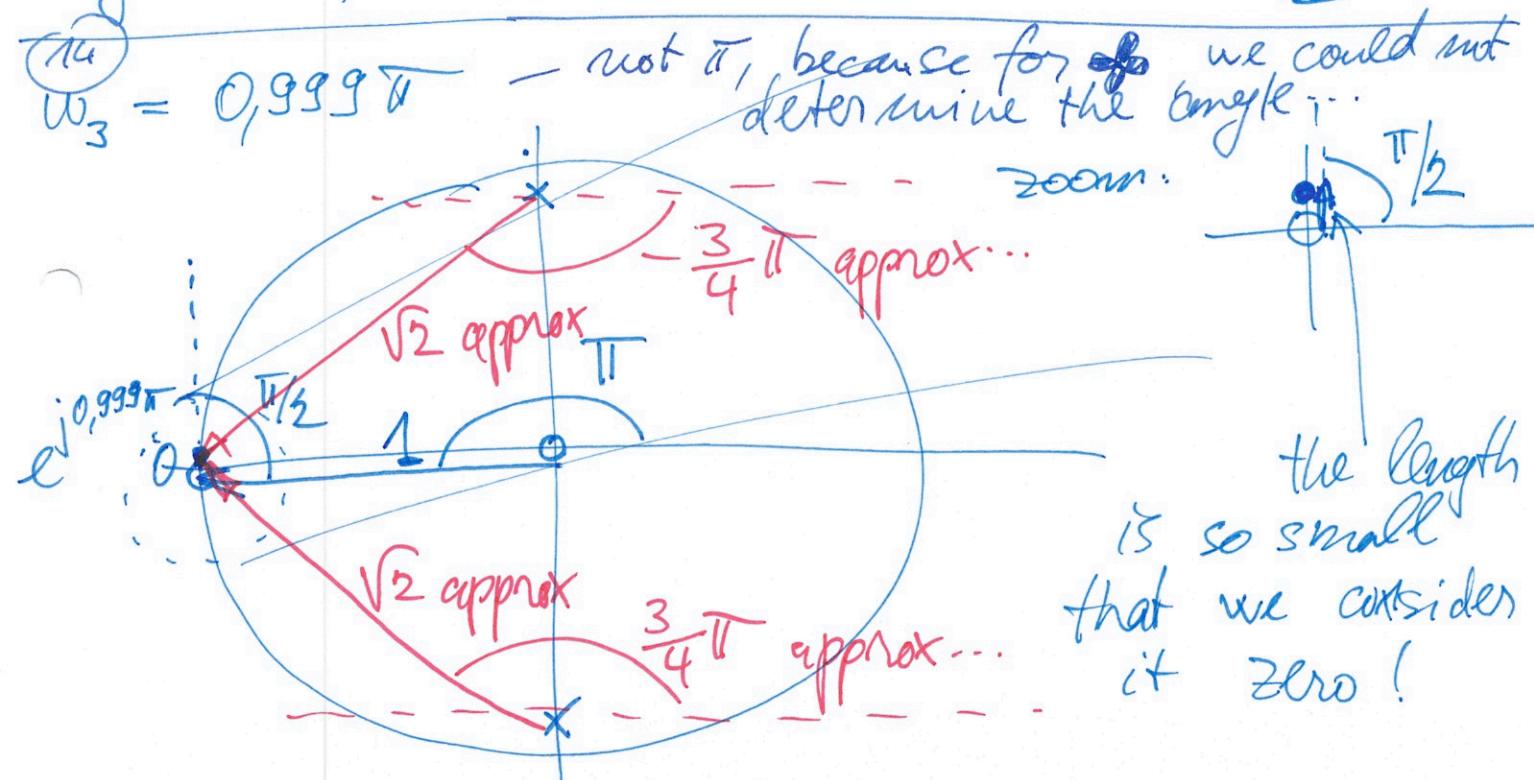

$$|H(e^{j0,999\pi})| = \frac{0 \cdot 1}{\sqrt{2} \cdot \sqrt{2}} = \underline{\underline{0}}$$

$$\arg H(e^{j0,999\pi}) = \pi + \frac{\pi}{2} - (-\frac{3}{4}\pi) - \frac{3}{4}\pi = \underline{\underline{\frac{3}{2}\pi}}$$

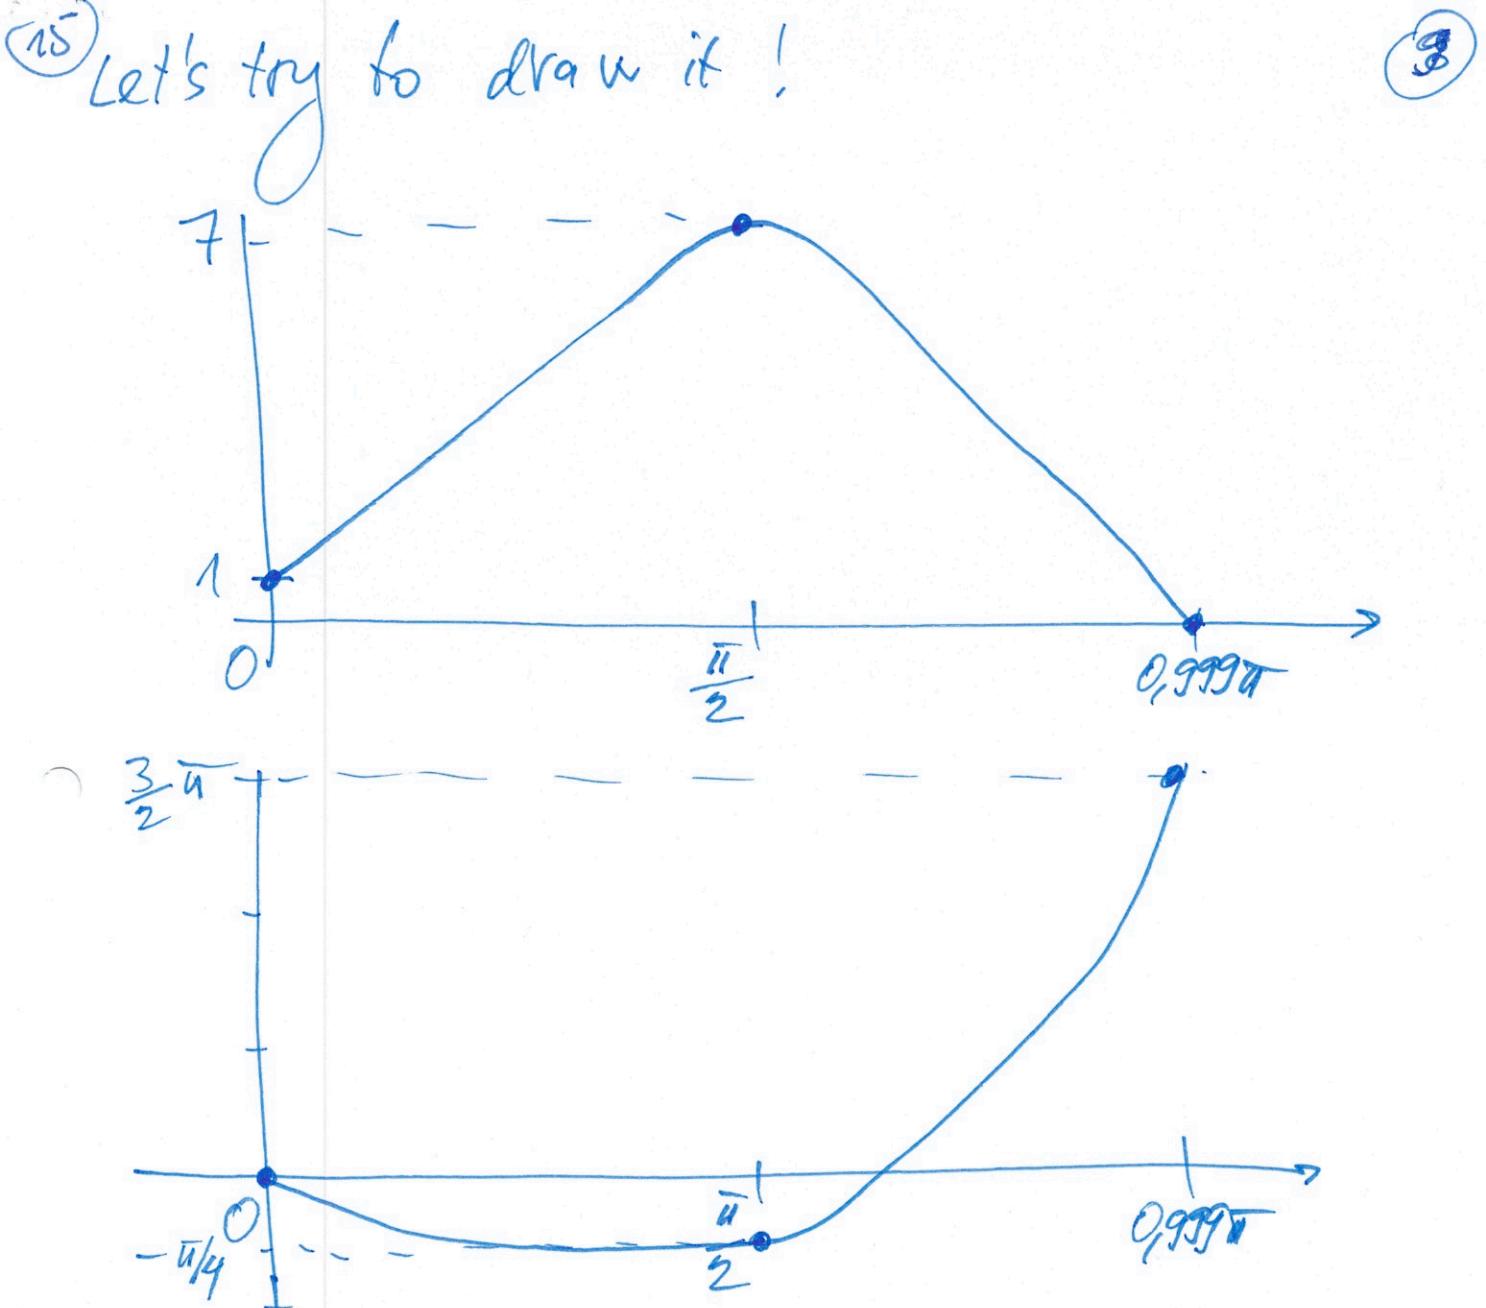

Now let the students look at the correct one (~~PDF~~ included).

Magnitude: not bad: clear band-pass filter.

Phase: well.... we'd need more points and consider that $\frac{3}{2}\pi \approx -\frac{\pi}{2}$.